



CONCRETE PAVED ISLAND.

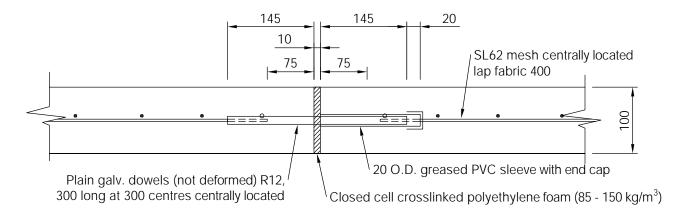


EXPANSION JOINT

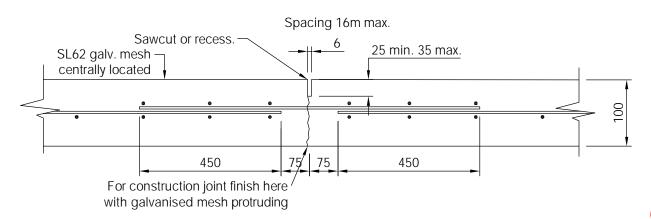

CONTRACTION JOINT

Spacing 4m max (Refer note 4).

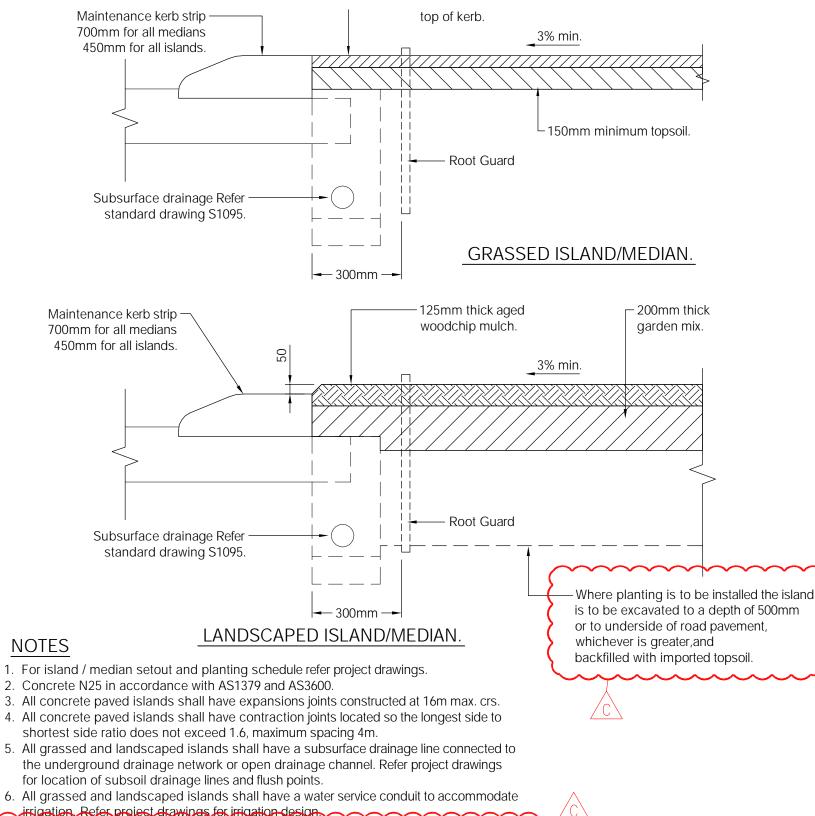

- 5. All grassed and landscaped islands shall have a subsurface drainage line connected to the underground drainage network or open drainage channel. Refer project drawings for location of subsoil drainage lines and flush points.
- irrigation. Refer project drawings for irrigation design.
- 7. Root barriers to be installed to a minimum of 1000mm beyond the estimated drip line of specified trees at maturity or to full length of median. Barriers to islands must be installed To entire perimeter of kerb.

8. All dimensions are in millimetres.

С	NOTES AMENDED	31/10/08
В	ROOT BARRIER AMENDED	13/01/06
Α	ORIGINAL ISSUE	12/03/04
REVISIONS		DATE

DISCLAIMER

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project—specific design and assessment by an appropriately qualified professional.



TRAFFIC ISLANDS / MEDIANS

Standard Drawing В