


TYPICAL BIKE LANE
MARKING ON ROADS WITH
UP TO 60Km/h SPEED LIMIT

PAVEMENT MARKINGS

LINE	LENGTH (mm)	GAP (mm)	WIDTH (mm)
CL - CONTINUITY LINE	1000	3000	100
GWL - GIVE WAY LINE	600	600	300
EL - EDGE LINE			100
BLL - BROKEN LANE LINE	3000	9000	100
DBL - DOUBLE BARRIER LINE			80
SL - STOP LINE			300

DISCONTINUE LANE MARKING AT INTERSECTION OR PROVIDE BICYCLE GIVE
WAY LINE APPROX. 10m LONG
SAME TREATMENT SHALL ONLY BE USED MID BLOCK IF CYCLISTS CAN BE
DIRECTED SAFELY INTO AN ALTERNATE FACILITY

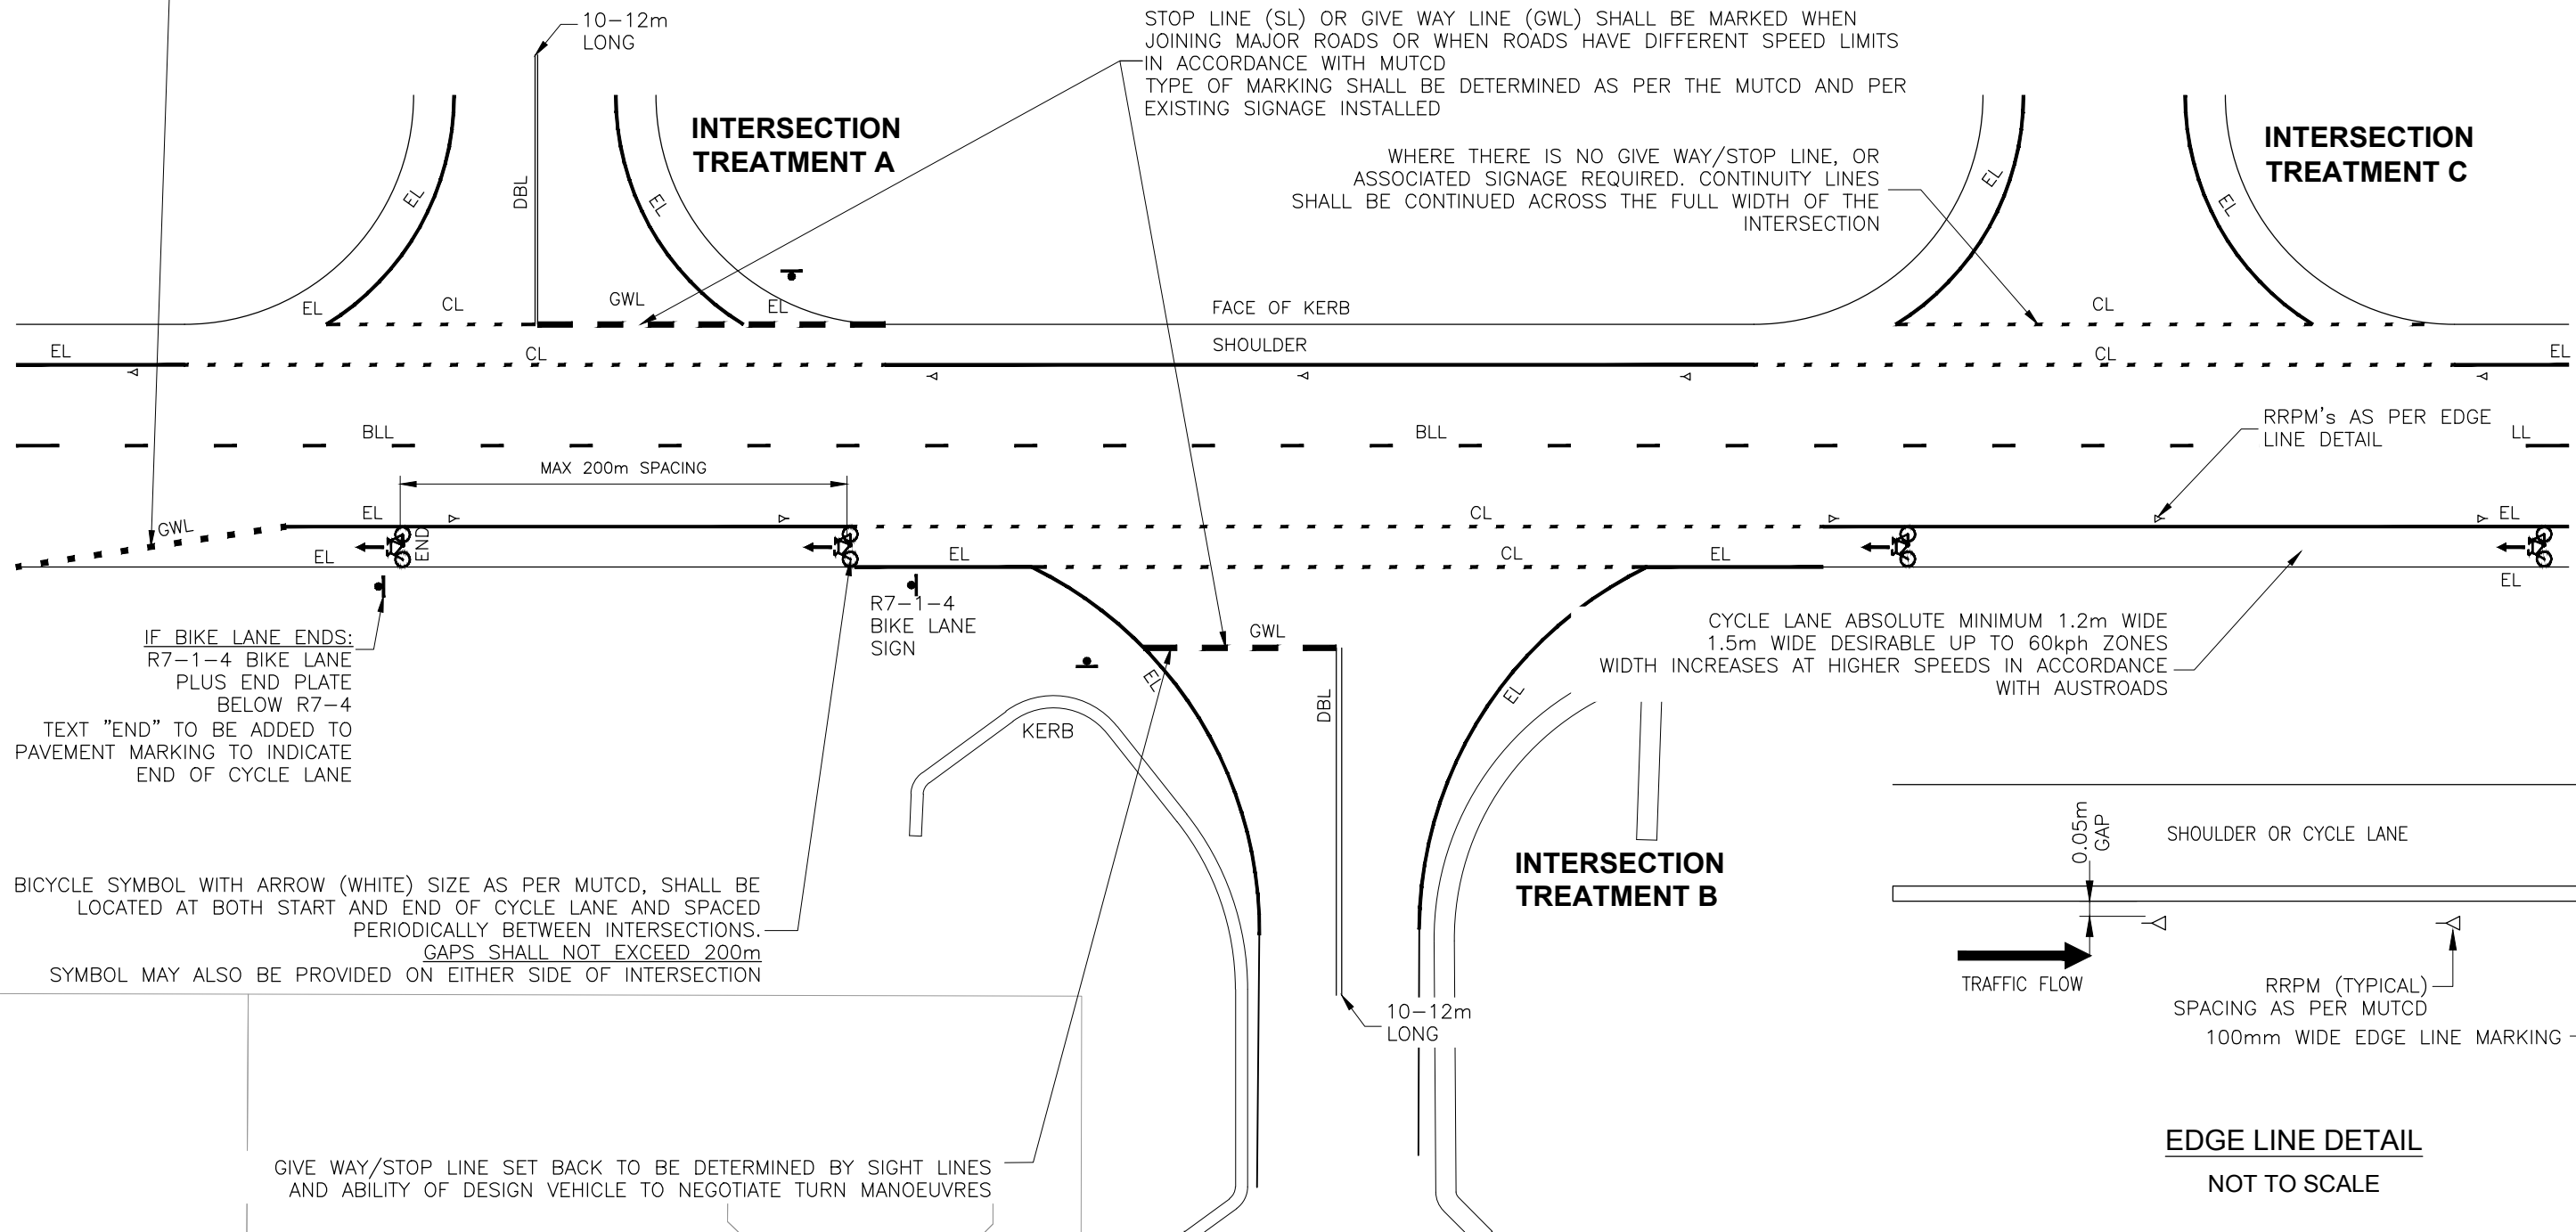

DISCLAIMER

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



STANDARD LINE TREATMENT
WITH CYCLE LANE & SEALED SHOULDER
(NON SIGNALISED INTERSECTION)

Standard
Drawing

S1096

A	ORIGINAL ISSUE	23/10/17
REVISIONS		DATE

A				
---	--	--	--	--