
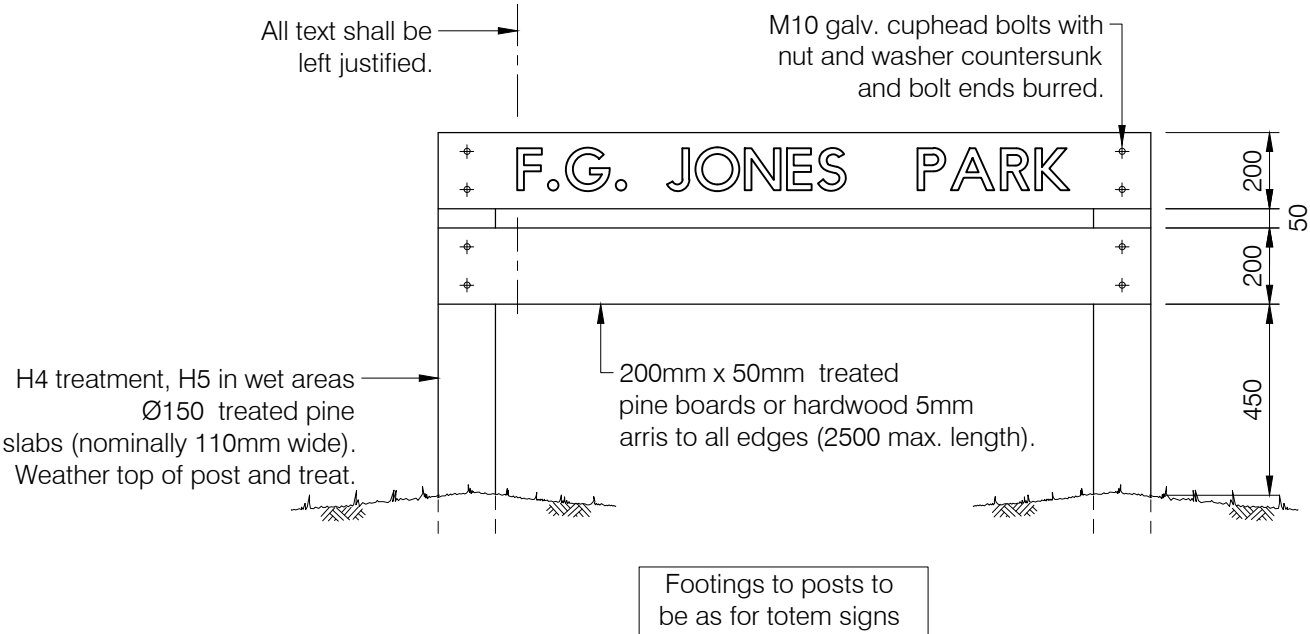
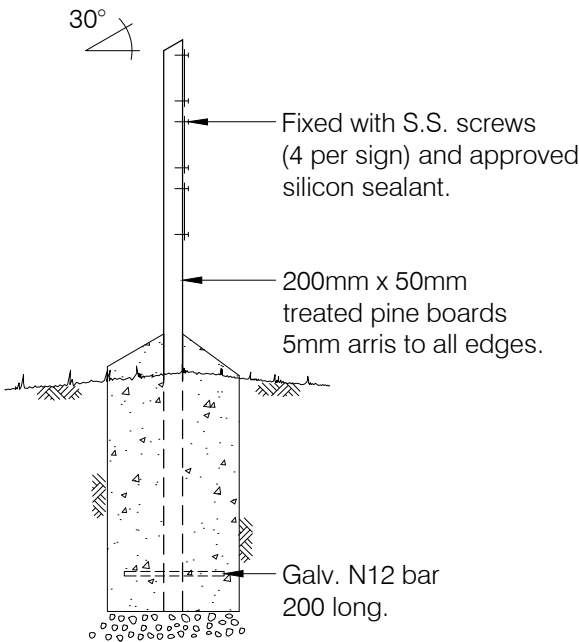
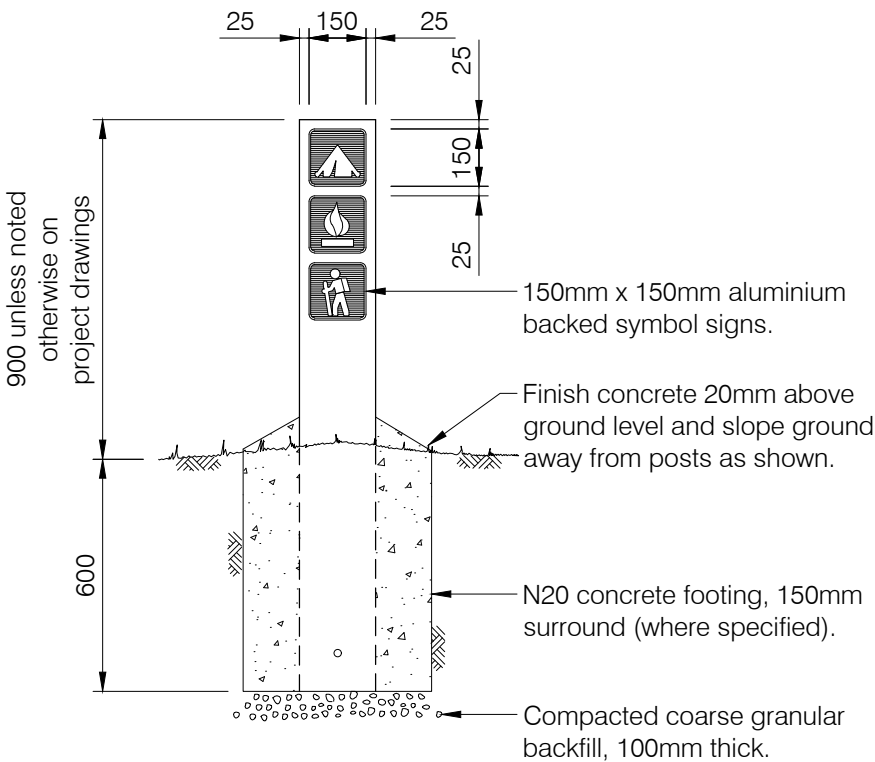
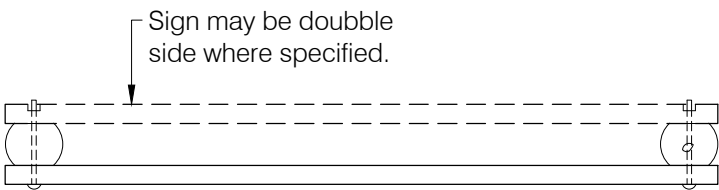


LETTER SIZES & SPACING

Letter size (S) (mm)	Between letters (L) (mm)	Between words (W) (mm)	Groove Width Optimum Range (G) (mm)	
30	17	60	6	5-7
40	22	80	8	6-10
50	25	100	9	7-11
60	28	120	10	8-12
75	41	150	15	12-16
100	44	200	18	16-20
110	47	220	18	17-20
150	55	300	20	16-22

NOTES

1. Actual signs, wording and letter sizes shall be as detailed on project drawings.
2. Totem signs shall be approved by Council prior to installation.
3. All text on identification signs shall be grooved with a Council approved router bit.
4. Signs shall be painted in accordance with Council's requirements.
5. All dimensions are in millimetres.
6. CCA treated timbers are not to be used for any element of construction shown on this drawing. ACQ, Copper Azole, LOSP or another Council approved alternative timber treatment will be considered, so long as each individual piece of timber is clearly marked to show the treatment type. In this instance, unless otherwise approved by Council, all above ground or exposed timbers shall be clearly marked by burn branding with text a minimum of 15mm in height so as to ensure the treatment type can be readily identified for the anticipated life of the timber.
6. Recycled plastic materials are the preferred alternative to treated timber.
7. Installation to be as per manufacturers recommendation.

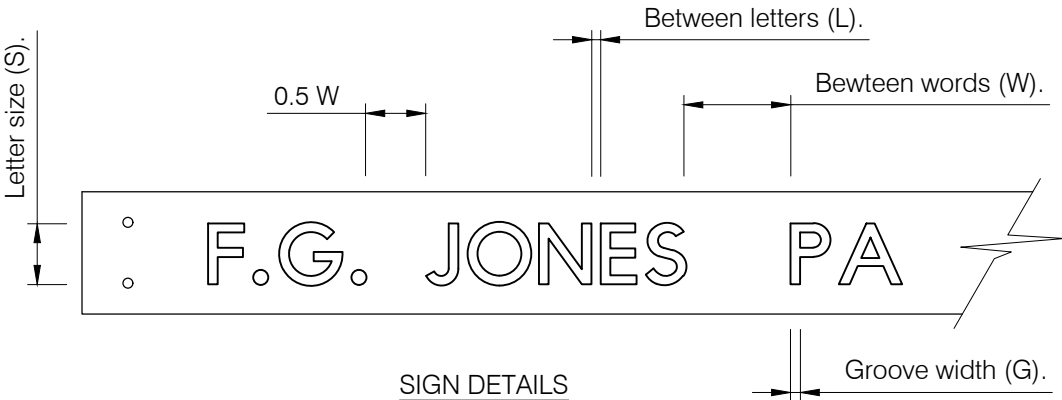

TOTEM SIGN

IDENTIFICATION SIGN

E	MINOR AMENDMENTS	23/10/17
D	MINOR AMENDMENTS	26/11/14
C	NOTE 6 ADDED	16-2-9
B	REFERENCES TO CCA TREATMENT REMOVED	01/02/07
A	ORIGINAL ISSUE	12/03/04
REVISIONS		DATE

DISCLAIMER

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



ADVISORY SIGNS

Standard
Drawing
S4390

A	B	C	D	E
---	---	---	---	---