



SECTION

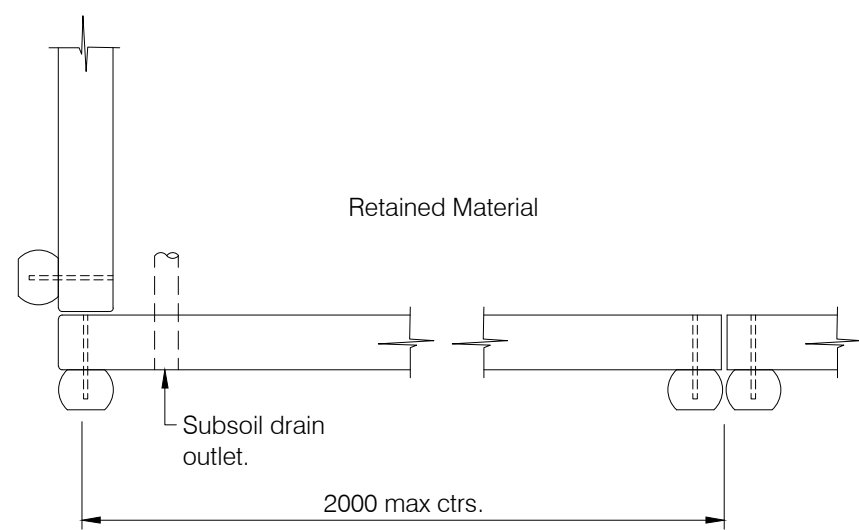


PLAN

LOG SLAB EDGING

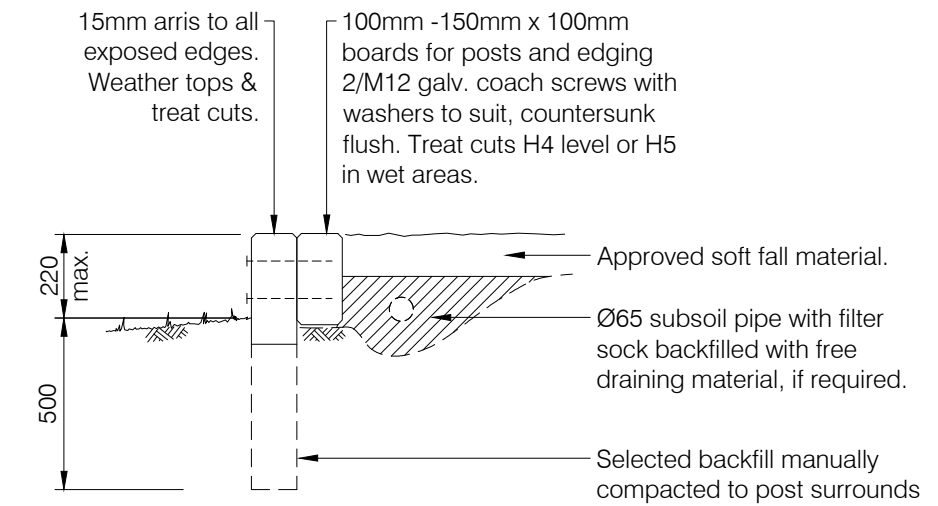

SECTION

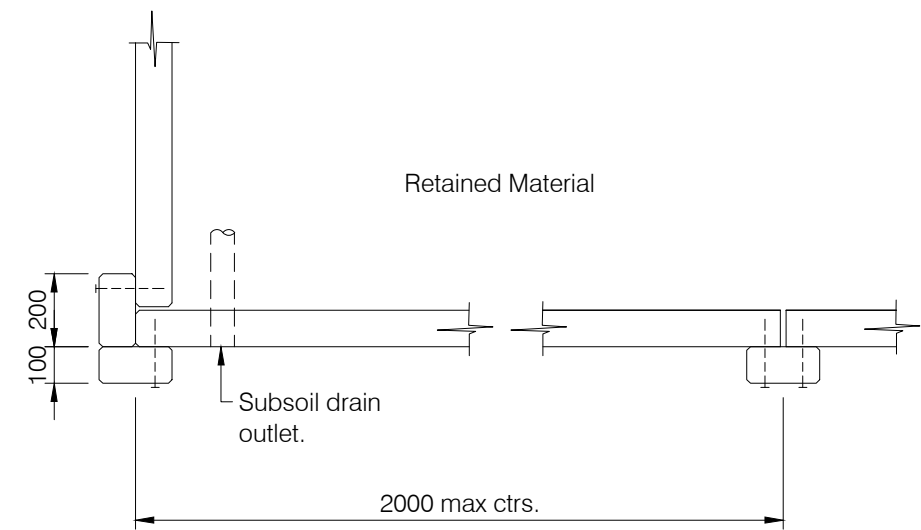

PLAN

SQUARE EDGING

NOTES

1. Soft fall material to Council approval .
2. Top of soft fall edging shall have the same level at all corners and may only be modified with prior approval of Council.
3. All dimensions are in millimetres.
4. Recycled plastic material are the preferred alternative to treated timber.
5. CCA treated timbers are not to be used for any element of construction shown on this drawing. ACQ, Copper Azole, LOSP or another Council approved alternative timber treatment will be considered, so long as each individual piece of timber is clearly marked to show the treatment type. In this instance, unless otherwise approved by Council, all above ground or exposed timbers shall be clearly marked by burn branding with text a minimum of 15mm in height so as to ensure the treatment type can be readily identified for the anticipated life of the timber.
6. H4 level of treatment. H5 in wet areas.
7. Installation to be as manufacturers recommendation.

E	MINOR AMENDMENTS	23/10/17
D	MINOR AMENDMENTS	26/11/14
C	NOTE 5 ADDED	16-2-9
B	CONC. TO POST FOOTING REV'D, CCA REF'S REM'D	
A	ORIGINAL ISSUE	12/03/04
REVISIONS		DATE

DISCLAIMER

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



TYPICAL PLAYGROUND EDGING

Standard Drawing S4370				
A	B	C	D	E