


SLAB SECTION

COMPACTED FILL

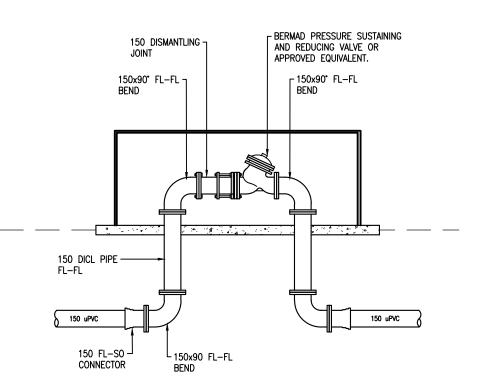

PRESSURE REDUCING VALVE ASSEMBLY

MATES

- 1. ALL COMPONENTS OF PRV CAGE TO BE GALVANISED.
- 2. CAGE AND SLAB DIMENSIONS TO BE CONFIRMED BASED ON ACTUAL PIPE DIMENSIONS PRIOR TO FABRICATION.

Α	ORIGINAL ISSUE		27/08/20
No.	Description		Date
Appr GM	oved for use Infrastructure Services		_

DISCLAIMER The Cairns Regional Council shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project—specific design and assessment by an appropriately qualified professional.



STANDARD DRAWING

ABOVE GROUND PRESSURE RELIEF VALVE (PRV) 150mm DIA. DRAWING NUMBER

S9021-CRC

REV A