COUNCIL	LETTERS	BACKGROUND	LOGO
Cairns Regional Council	White	Green	Yes
Cassowary Coast Regional Council	Green	Gold	No
Tablelands Regional Council	Green	Gold	No
Cook Shire Council	Black	White	No
Croydon Shire Council	Royal Blue	Gold	No

URBAN AREAS. Align post with property seal boundary Edge RURAL AREAS

LOCATION OF SIGNS

KENT RD

Additional sign when required at T intersections.

Galvanised endcap.

Fixing bracket 'Appleton' Type BR-E-82-81 or equivalent.

← 60 O.D. x 3.6 galvanized steel tube.

-Ø500 x 100 thick concrete mowing strip surround, 20mm fall away from post.

(refer note 3)

Ø500

150

concrete footing. Ø12 bar welded to post or post flattened to prevent rotation.

Ø300 x 600mm deep

ELEVATION

Note: Alternative options will be considered with Council's written approval


STANDARD ABBREVIATIONS


Street - ST Esplanade - ESP Road - RD Crescent - CR - TCE Close - CL Terrace Place - PL - CT Court - GR - DR Drive Grove Avenue - AV Lane - LA Parade - PDE Boulevarde - BVD

(Other abbreviations to be approved by council)

NOTES

- Name Plates: 150mm wide x 6mm thick grey PVC to be sheeted with class 1 white
- Letters: lettering to be cut in reverse from transparent EC film overlaid over class 1 reflective. Colours as per table unless otherwise approved by Council.
- As an alternative to the mowing strip, a precast valve box surround may be placed around base of post and concrete infilled.
- All signs to be approved by Council prior to erection.
- Signs to be positioned on the side of street that provides best visibility.
- Concrete N20 in accordance with AS1379 and AS3600.
- Address numbers are only to be provided to street name signs when authorized and approved by Council.
- Street name lengths are to be in 100mm increments from 500mm minimum to 1200mm maximum.
- Street names may in rare exceptions incorporate the name over two separate lines. In this instance contact Council for further clarification and approval.
- 10. Font: Highway Gothic C, Length at 100%. Street name letter height 100mm unless otherwise approved by Council.
- 11. Other options for street name signs may be considered with written approval from Council required prior to installation.

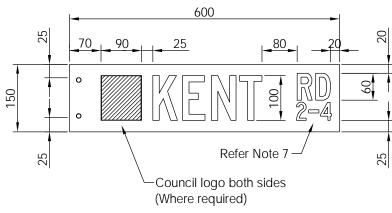

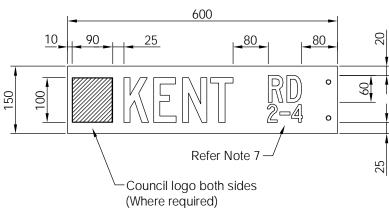

STANDARD STREET NAME SIGN SPECIFICATIONS

·		
D	REPLACED WITH CRC STD DWGS AND TABLE	28/11/12
С	DIMENSION REVISED	01/02/07
В	MINOR NOTE CHANGES	13/01/06
Α	ORIGINAL ISSUE	12/03/04
REVISIONS		

DISCLAIMER

The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project—specific design and assessment by an appropriately qualified professional.



STREET NAME SIGN

Standard Drawing S1040

B C D

2200 min 3000 max