




DIRECTIONAL KERB RAMP

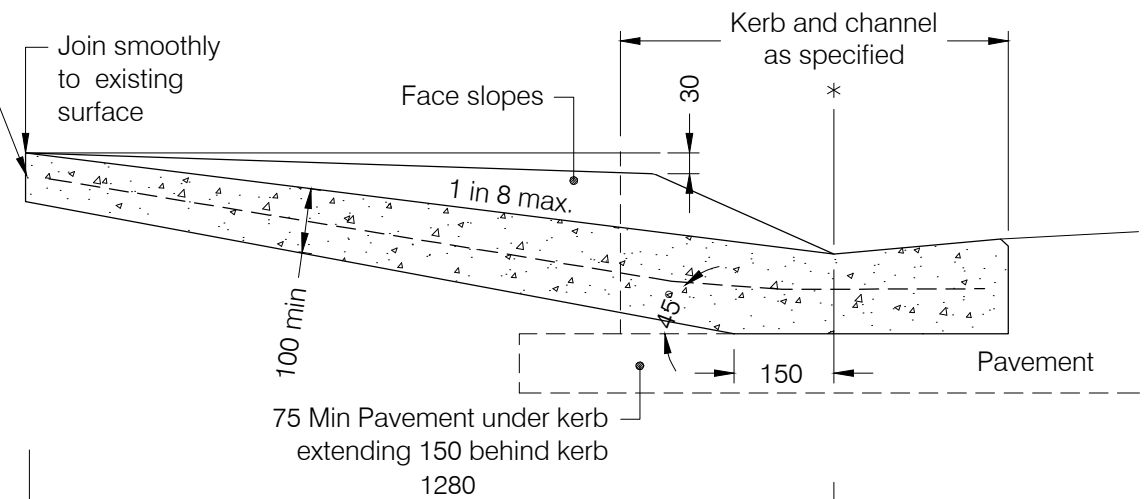


SECTION AT LAYBACK KERB

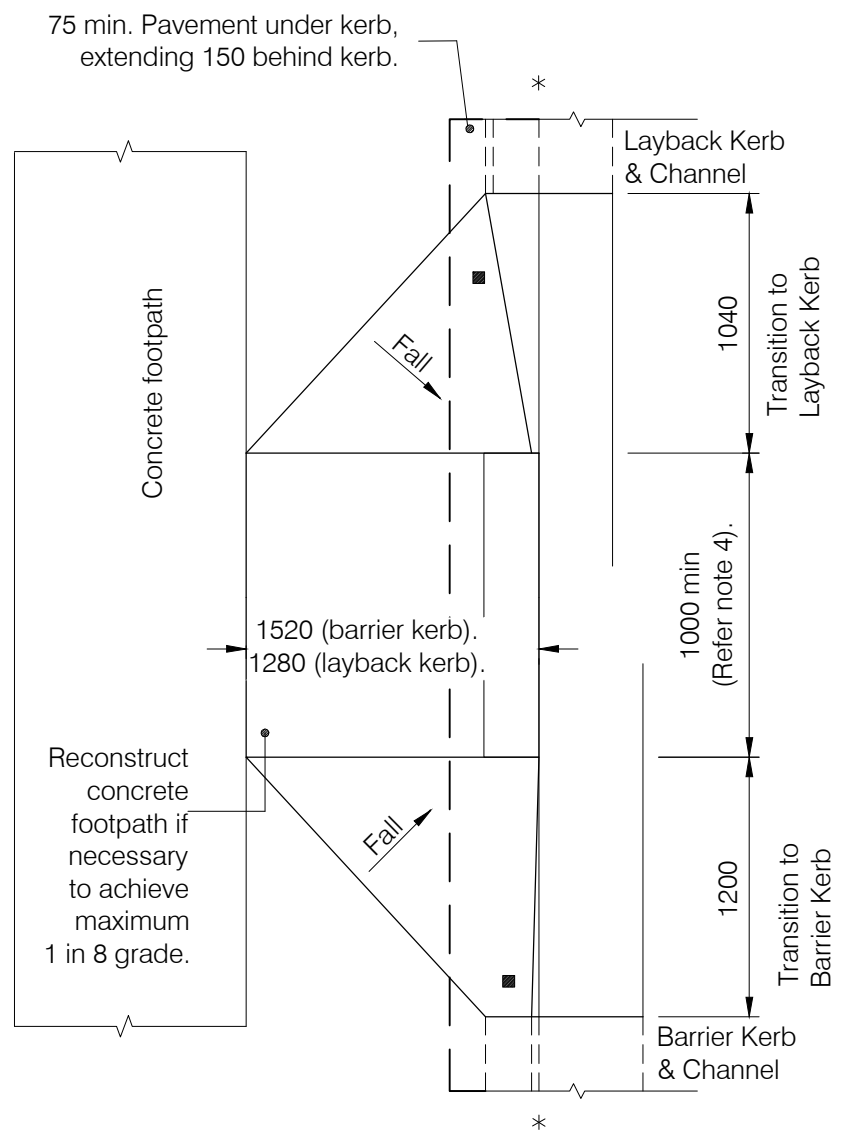

PLAN

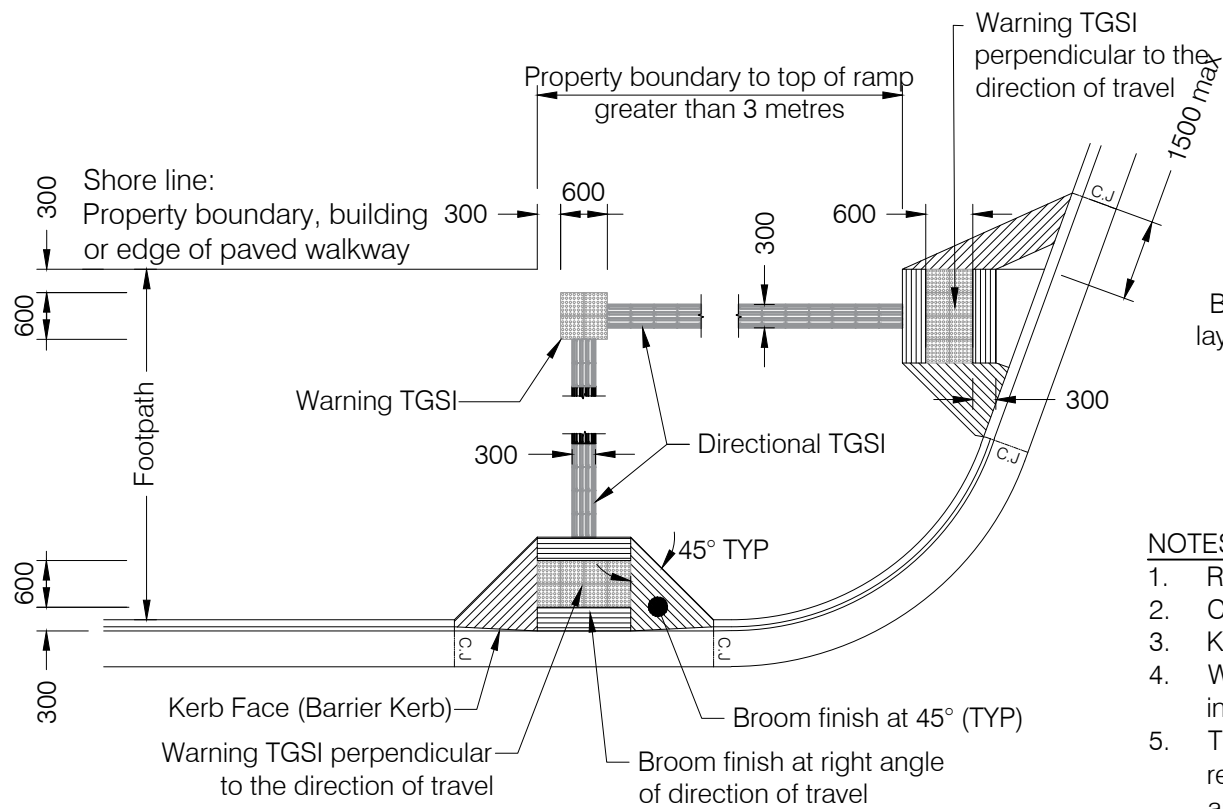

PLAN VIEW - COMPLIANT KERB RAMPS

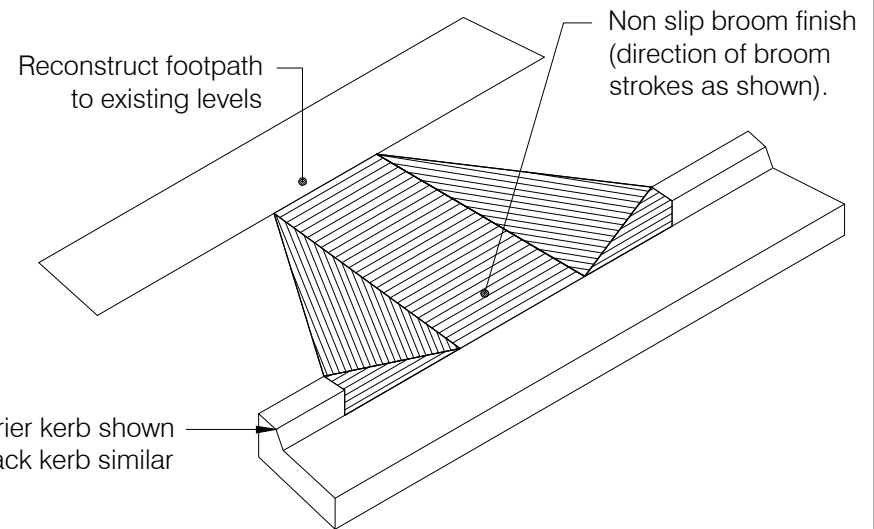

PERSPECTIVE VIEW

NOTES

1. Refer project drawings for kerb ramp locations and widths.
2. Concrete N32 minimum in accordance with AS1379 and AS3600.
3. Kerb ramp to be cast monolithically.
4. Where a kerb ramp adjoins a pathway/bikeway the ramp width is to be increased to match pathway/bikeway width.
5. TGSIs not required for Minor Collector environments and below. TGSIs are required for all densities above Minor Collector and CBD environments and are to be installed as per AS1428.4
6. All dimensions in millimetres.
7. Kerb ramp to be installed beyond the curve tangent point at all intersections.
8. Kerb ramps to be installed directionally in line with the opposing pram ramp.
9. Retrofitted pram ramps may have tray left in situ with 12mm dowels @ 600 CTRS across the joint.

LEGEND

- * NOM Kerb Line.
- Saw cut if kerb and channel exists.

E	MINOR AMENDMENTS	05/12/23
D	COMPLIANT KERB RAMP ADDED	27/08/20
C	MINOR AMENDMENTS	23/10/17
B	MINOR AMENDMENTS	26/11/14
A	ORIGINAL ISSUE	12/03/04
REVISIONS		DATE

DISCLAIMER
 The authors and sponsoring organisations shall have no liability or responsibility to the user or any other person or entity with respect to any liability, loss or damage caused or alleged to be caused, directly or indirectly, by the adoption and use of these Standard Drawings including, but not limited to, any interruption of service, loss of business or anticipatory profits, or consequential damages resulting from the use of these Standard Drawings. Persons must not rely on these Standard Drawings as the equivalent of, or a substitute for, project-specific design and assessment by an appropriately qualified professional.



KERB RAMP

Standard Drawing
S1016

A	B	C	D	E
---	---	---	---	---